

# K-SERIES™

COMMERCIAL PACKAGED ROOFTOP UNITS  
2- TO 25-TON KG/KC/KH MODELS

UP TO 13.0 SEER,  
14.5 IEER AND 12.7 EER



**ALLIED**™  
Commercial

## PRECISE. VERSATILE. SOLID.

K-Series™ rooftop units are known for precise, dependable performance. And thanks to advanced features and thoughtful product designs, the K-Series is flexible, too, making it an excellent choice for virtually any commercial application.

### K-SERIES AT A GLANCE:

Engineered for installation flexibility, energy-efficient performance and easy serviceability

Gas/electric, electric/electric or heat pump units, ranging in sizes from 2 to 25 tons

Standard- and high-efficiency units available

More than 100 field-selectable options to ensure it meets your specific application

### EFFICIENCY RATING

Up to 13.0 SEER, 14.5 IEER and 12.7 EER

### WARRANTY

15-YEAR LIMITED WARRANTY on stainless steel gas heat exchanger

10-YEAR LIMITED WARRANTY on aluminized gas heat exchanger

5-YEAR LIMITED WARRANTY on compressor

3-YEAR LIMITED WARRANTY on Eco-Last™ Coil System

1-YEAR LIMITED WARRANTY on covered components

See warranty certificate for actual details.

### OPTIONS FOR OPTIMAL EFFICIENCY

K-Series units are available in two configurations—standard- and high-efficiency. Either unit can also be made up to 27% more efficient with the addition of an optional, single-zone VAV (Variable Air Volume) supply fan. High-efficiency models may also qualify for state and local utility rebates, helping you save even more.

### QUICK AND EASY TO INSTALL AND SERVICE

The K-Series has several features designed to reduce both installation and service time:

- Isolated compressor for fast, accurate charge confirmation.
- Slide-out blower for quick and easy cleaning, belt adjustment and parts replacement.
- Easy-to-reach gas compartment for quick and easy analysis and service.

### THE LOGISTICAL CHOICE FOR QUICK DELIVERY

The K-Series is versatile and efficient when it comes to shipment, too. Allied Commercial has wholesale distributor partners throughout the U.S. and Canada, which gives you fast, local access to K-Series equipment. So you get the performance you need, when you need it.

To check availability near you, contact your local Allied Commercial distributor.



# FIELD-INSTALLED OPTIONS ALLOW EXTENSIVE CUSTOMIZATION

## TAILOR THE K-SERIES TO YOUR NEEDS

With more than 100 field-installed options to choose from, the K-Series can provide the exact solution for almost any application. K-Series units range from 2 to 25 tons in capacity, and are available in three configurations: gas/electric, electric/electric and heat pump.

## FIELD-INSTALLED ACCESSORIES

K-Series units include convenient features like plug connections for wiring, panel knock-outs and pre-installed accessory framing. You can choose a stock unit and quickly install accessories, providing immediate relief when you need it.

- Field-powered GFI
- Disconnects
- Economizers with single or dual enthalpy control
- Electric heat
- 50% constant-volume power exhaust fan
- CO<sub>2</sub> sensor
- Return and supply air smoke detectors
- Low ambient kits
- Hail guards
- Coil guards
- LPG conversion kit (gas/electric only)
- -40°F cold weather kit (gas/electric only)
- Combustion air intake and flue exhaust extensions (gas/electric only)
- Blower proving switch
- Dirty filter switch
- Manual outdoor air dampers (25%)
- Motorized outdoor air dampers

## FACTORY-INSTALLED OPTIONS FOR FAST INSTALLATION

For quick, built-to-order solutions, K-Series units can be built and tested at the factory to exact specifications with these options:

- Single-zone VAV (Variable Air Volume) supply fan option
- Coil corrosion protection
- Stainless steel heat exchanger
- Hinged doors

## FACTORY OPTIONS OR FIELD ACCESSORIES


For maximum time and cost flexibility, choose to have these options installed in the field or at the factory.

- Economizers
- Barometric relief dampers
- High- and low-static drive kits
- Heaters (electric/electric only)
- BACnet module



## CONNECT TO NEW OR EXISTING BACNET BUILDING AUTOMATION SYSTEMS

All K-Series units can now be integrated with BACnet, an industry-leading building automation platform. Either factory- or field-installed, the BACnet module allows remote monitoring and adjusting of a building's heating and cooling. Digital sensors are fully programmable, providing precise monitoring and control, while optional password protection prevents unwanted temperature adjustments.

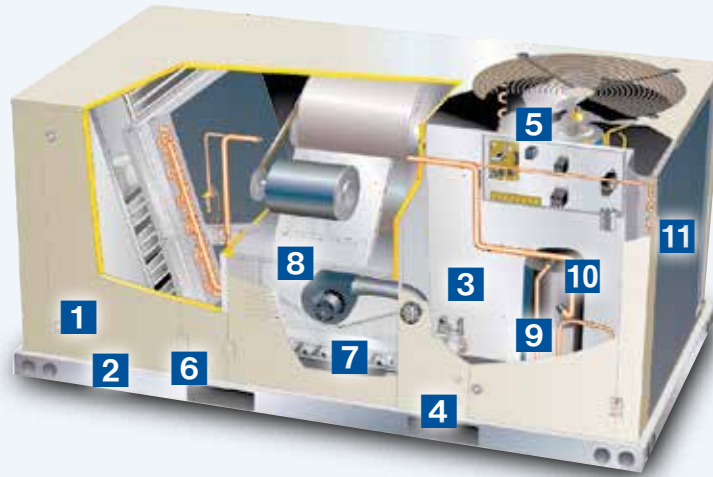

- 1 HINGED ACCESS PANELS**—Factory option provides quick access to components and protects panels and roof from damage during servicing.
- 2 FULL-PERIMETER BASE RAIL (WITH RIGGING HOLES)**—Provides greater structural integrity, so the unit is easier to handle when rigging and transporting.
- 3 ISOLATED COMPRESSOR COMPARTMENT**—Allows performance check during normal compressor operation without disrupting airflow.
- 4 FORK SLOTS ON THREE SIDES**—Easy to pick up and transport units from almost any angle.
- 5 INDEPENDENT MOTOR MOUNT**—Allows for easy and efficient service access without removing the top panel.
- 6 CORROSION-RESISTANT, REMOVABLE DRAIN PAN**—Provides application flexibility, durability and improved serviceability. Bottom drain capability also standard.
- 7 LARGE BURNER COMPARTMENT**—Designed for serviceability, the contractor-facing gas components allow for fast routine maintenance and diagnostics.
- 8 PREDEFINED SUPPLY FAN MOTOR/DRIVE COMBINATIONS**—Make selecting components to meet static and airflow requirements quick and easy.
- 9 SCROLL COMPRESSOR**—Standard on all units for reliable long-term operation.
- 10 HIGH-PRESSURE SWITCH**—Improves reliability by safeguarding compressor from extreme operating conditions.
- 11 ECO-LAST™ COIL SYSTEM**—Uses up to 52% less refrigerant, is up to 59% lighter and has up to 20% fewer brazed joints than typical units (standard on all 7.5- to 12.5-ton gas/electric and electric/electric models; heat pump models use tube and fin coils).

## K-SERIES HIGH-EFFICIENCY ROOFTOP UNIT PERFORMANCE SPECIFICATIONS

		COOLING DATA		HEATING INPUT				PHYSICAL DATA			
NOM. TON	MODEL	EER	IEER	LOW	STD.	MED.	HIGH	DIMENSIONS H X W X L [INCHES]	SHIP WT. [LBS.]		
GAS/ ELECTRIC UNITS	7.5	KGA092H4B/M	12.5	13.0/14.0	—	130	180	240	47 x 61 x 102	1,154	
	8.5	KGA102H4B/M	12.2	12.9/14.0	—	130	180	240	47 x 61 x 102	1,174	
	10	KGA120H4B/M	12.0	13.0/13.8	—	130	180	240	47 x 61 x 102	1,222	
	13	KGA156H4B/M	12.0	13.6/14.1	—	260	360	—	55 x 91 x 108	2,135	
	15	KGA180H4B/M	12.0	13.5/13.7	—	260	360	480	55 x 61 x 133	2,315	
	17.5	KGA210H4B/M	12.0	13.0/14.0	—	260	360	480	55 x 61 x 133	2,440	
	20	KGA240H4B/M	12.0	13.2/14.5	—	260	360	480	55 x 61 x 133	2,525	
25	KGA300H4B/M	10.5	10.9/13.8	—	260	360	480	55 x 61 x 133	2,630		
				KW RANGE*							
ELECTRIC/ ELECTRIC UNITS	7.5	KCA092H4B/M	12.7	13.0/14.0	7.5	15.0	22.5	30.0	45.0	47 x 61 x 102	1,112
	8.5	KCA102H4B/M	12.4	12.9/14.0	7.5	15.0	22.5	30.0	45.0	47 x 61 x 102	1,132
	10	KCA120H4B/M	12.2	13.2/14.0	15.0	22.5	30.0	45.0	60.0	47 x 61 x 102	1,187
	13	KCA156H4B/M	12.0	13.6/14.1	15.0	30.0	45.0	60.0	—	55 x 91 x 108	1,985
	15	KCA180H4B/M	12.0	13.5/13.7	15.0	30.0	45.0	60.0	—	55 x 61 x 133	2,165
	17.5	KCA210H4B/M	12.0	13.0/14.0	15.0	30.0	45.0	60.0	90.0	55 x 61 x 133	2,290
	20	KCA240H4B/M	12.0	13.2/14.5	15.0	30.0	45.0	60.0	90.0	55 x 61 x 133	2,375
25	KCA300H4B/M	10.5	10.9/13.8	15.0	30.0	45.0	60.0	90.0	55 x 61 x 133	2,480	

# K-SERIES STANDARD-EFFICIENCY ROOFTOP UNIT PERFORMANCE SPECIFICATIONS

	NOM TON.	MODEL	COOLING DATA		HEATING INPUT				PHYSICAL DATA		
			EER	SEER OR IEER	LOW	STD.	MED.	HIGH	DIMENSIONS H X W X L [INCHES]	SHIP WT. [LBS.]	
GAS/ELECTRIC UNITS	2	KGA024S4D	11.4	13.0	—	65,000	—	—	39 x 47 x 86	591	
	2.5	KGA030S4D	11.2	13.0	—	65,000	—	—	39 x 47 x 86	593	
	3	KGA036S4B	10.7	13.0	—	65,000	105,000	—	39 x 47 x 86	594	
	4	KGA048S4B	11.0	13.0	—	65,000	105,000	150,000	39 x 47 x 86	631	
	5	KGA060S4B	11.2	13.0	—	65,000	105,000	150,000	39 x 47 x 86	661	
	6	KGA072S4B	11.0	11.2	—	65,000	105,000	150,000	47 x 47 x 86	760	
	7.5	KGA090S4B	11.0	11.2	—	—	105,000	150,000	47 x 47 x 99	865	
	7.5	KGA092S4B/M	11.0	11.8/13.0	—	130,000	180,000	240,000	47 x 61 x 102	1,052	
	8.5	KGA102S4B/M	11.0	11.8/13.0	—	130,000	180,000	240,000	47 x 61 x 102	1,072	
	10	KGA120S4B/M	11.0	11.8/13.0	—	130,000	180,000	240,000	47 x 61 x 102	1,112	
	12.5	KGA150S4B/M	11.0	11.4/12.0	—	130,000	180,000	240,000	47 x 61 x 102	1,202	
	15	KGA180S4B/M	10.8	11.0/12.6	—	260,000	360,000	480,000	55 x 92 x 108	1,990	
	17.5	KGA210S4B/M	10.8	12.0/13.1	—	260,000	360,000	480,000	55 x 92 x 108	2,135	
	20	KGA240S4B/M	10.8	11.0/13.0	—	260,000	360,000	480,000	55 x 92 x 133	2,380	
25	KGA300S4B/M	10.0	10.0/12.0	—	260,000	360,000	480,000	55 x 92 x 133	2,380		
					KW RANGE*						
ELECTRIC/ELECTRIC UNITS	2	KCA024S4D	11.4	13.0	7.5	10.0	—	—	39 x 47 x 86	555	
	2.5	KCA030S4D	11.2	13.0	7.5	10.0	—	—	39 x 47 x 86	557	
	3	KCA036S4B	10.7	13.0	7.5	15.0	—	—	39 x 47 x 86	558	
	4	KCA048S4B	11.0	13.0	7.5	15.0	—	—	39 x 47 x 86	595	
	5	KCA060S4B	11.2	13.0	7.5	15.0	22.5	—	39 x 47 x 86	625	
	6	KCA072S4B	11.2	11.4	7.5	15.0	22.5	30.0	47 x 47 x 86	724	
	7.5	KCA090S4B	11.2	11.4	7.5	15.0	22.5	30.0	47 x 47 x 99	827	
	7.5	KCA092S4B/M	11.2	12.0/13.2	7.5	15.0	22.5	30.0	45.0	47 x 61 x 102	1,052
	8.5	KCA102S4B/M	11.2	12.0/13.2	7.5	15.0	22.5	30.0	45.0	47 x 61 x 102	1,072
	10	KCA120S4B/M	11.2	12.0/13.2	15.0	22.5	30.0	45.0	60.0	47 x 61 x 102	1,112
	12.5	KCA150S4B/M	11.2	11.6/12.2	15.0	23.0	30.0	45.0	60.0	47 x 61 x 102	1,202
	15	KCA180S4B/M	11.0	11.2/12.8	15.0	30.0	45.0	60.0	—	55 x 92 x 108	1,840
	17.5	KCA210S4B/M	11.0	12.2/13.3	15.0	30.0	45.0	60.0	90.0	55 x 92 x 108	1,985
	20	KCA240S4B/M	11.0	11.2/13.2	15.0	30.0	45.0	60.0	90.0	55 x 92 x 133	2,230
25	KCA300S4B/M	10.1	10.1/12.1	15.0	30.0	45.0	60.0	90.0	55 x 92 x 133	2,230	
					47 CAP.	HSPF/COP 47	17 CAP.	COP 17			
HEAT PUMPS	2	KHA024S4D	11.2	13.0	24,000	7.7/3.4	14,400	2.3	39 x 47 x 86	591	
	2.5	KHA030S4D	11.3	13.0	29,200	7.7/3.5	17,600	2.3	39 x 47 x 86	593	
	3	KHA036S4B	10.9	13.0	36,400	7.7/3.6	22,000	2.3	39 x 47 x 86	595	
	4	KHA048S4B	10.7	13.0	48,000	7.7/3.5	29,500	2.4	39 x 47 x 86	617	
	5	KHA060S4B	10.9	13.0	60,500	7.7/3.6	36,000	2.4	47 x 47 x 86	727	
	6	KHA072S4B	11.0	11.2	70,000	3.3	40,000	2.25	47 x 47 x 99	810	
	7.5	KHA092S4B/M	11.0	12.2/12.5	89,000	3.3	53,000	2.25	47 x 61 x 102	1,137	
	8.5	KHA102S4B/M	11.0	12.2/12.5	100,000	3.3	55,000	2.25	47 x 61 x 102	1,169	
	10	KHA120S4B/M	11.0	11.3/12.5	116,000	3.3	72,000	2.25	47 x 61 x 102	1,235	
	12.5	KHA150S4B/M	10.6	10.7/12.0	138,000	3.3	82,000	2.05	47 x 61 x 124	1,435	
	15	KHA180S4B/M	10.6	12.2/13.2	178,000	3.2	104,000	2.05	55 x 92 x 130	2,150	
	20	KHA240S4B/M	10.6	11.2/13.0	220,000	3.2	128,000	2.05	55 x 92 x 130	2,350	

Certified in accordance with the USE certification program which is based on ARI Standard 210/240: 95°F outdoor air temperature and 80°F dB/67°F wb entering evaporator coil air.

Certified in accordance with the ULE certification program which is based on ARI standard 340/360: 95°F outdoor air temperature and 80°F dB/67°F wb entering evaporator air; minimum external duct static pressure.

Direct-drive blower motors available for 2- to 5-ton models.

\*Nominal electric heat capacities are rated at 240V, 480V and 600V.

\*\*Heating CFM for gas models varies dependent upon heat option selected. Minimum heating CFM for heat pumps does not include supplemental electric heat.

Note: Due to Allied Commercial's ongoing commitment to quality, all specifications, ratings and dimensions are subject to change.



Visit us at [www.allied-commercial.com](http://www.allied-commercial.com) or contact us at 1-800-448-5872.

© 2013 Allied Air Enterprises LLC, a Lennox International Inc. Company



Litho U.S.A.

ACKS-300 06/13 PC74929